


NECO COUPLINGS

PRODUCT BULLETIN	VICTAULIC GROOVE HOSE NIPPLE
-------------------------	-------------------------------------

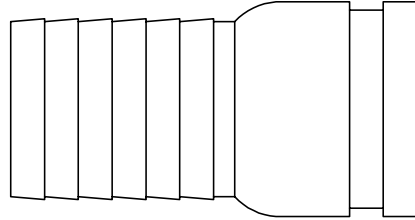

USES: Fluid or Bulk handling, when victaulic nipple is require on end of hose.

SIZES: 1/2", 3/4", 1", 1¼", 1½", 2", 2½", 3", 4", 5", 6", 8", 10", 12"

MATERIALS: Plain Steel - Sch 40 Pipe

PRESSURE RATING: 1/2" - 4" = 100 PSI; 5" - 8" = 75 PSI; 10" - 12" = 50 PSI

STANDARDS: Manufactured to industry standards. Interchangeable with all major brands of this type coupling.

DIMENSIONS

		1/2	3/4	1	1¼	1½	2	2½	3	4	5	6	8	10	12	
	A	2.9	3.2	3.4	3.6	4.0	4.6	5.5	6.0	7.3	8.7	10.0	12.4	12.8	13.8	
	B	1.5	1.5	1.6	1.8	1.9	2.5	2.9	3.0	3.9	5.4	6.5	7.9	7.5	10.0	
	C	1/2	3/4	1	1¼	1½	2	2½	3	4	5	6	8	10	12	
	D	.84	1.05	1.32	1.66	1.90	2.38	2.88	3.50	4.50	5.56	6.63	8.63	10.8	12.8	
	E	5/16	5/16	5/16	5/16	5/16	5/16	5/16	5/16	5/16	3/8	3/8	3/8	1/2	1/2	1/2
	F	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	3/4	3/4	3/4
	G	.04	.06	.06	.06	.06	.06	.06	.06	.06	.08	.10	.10	.10	.10	.20
	Wt	.13#	.20#	.33#	.50#	.75#	1#	2.3#	2.8#	5.5#	8#	15#	25#	36#	47#	
	A	Length Overall			B	Length Hose Shank			C	Hose Shank Size						
D	Outside Diameter			E	Groove Width			F	Length to Groove							
G	Depth of Groove															

National Equipment Corporation
 1806 Buchanan St.
 Brenham, Tx 77833

TEL: 409/830-8030
 TEL: 800/933-2316
 FAX: 409/830-0983