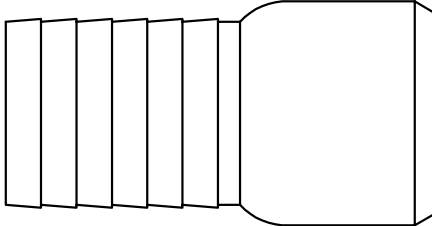
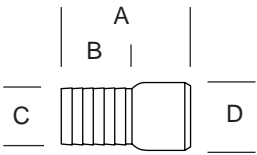


NECO COUPLINGS

PRODUCT BULLETIN	WELDING HOSE NIPPLE																																																																																										
																																																																																											
<p>USES:</p> <p>SIZES:</p> <p>MATERIALS:</p> <p>PRESSURE RATING:</p> <p>STANDARDS:</p>	<p>Fluid or Bulk handling, when welding nipple is required on end of hose.</p> <p>1/2", 3/4", 1", 1¼", 1½", 2", 2½", 3", 4", 5", 6", 8", 10", 12"</p> <p>Plain Steel - Sch 40 Pipe</p> <p>1/2" - 4" = 100 PSI; 5" - 8" = 75 PSI; 10" - 12" = 50 PSI</p> <p>Manufactured to industry standards. Interchangeable with all major brands of this type coupling.</p>																																																																																										
DIMENSIONS																																																																																											
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>½</th> <th>¾</th> <th>1</th> <th>1¼</th> <th>1½</th> <th>2</th> <th>2½</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>8</th> <th>10</th> <th>12</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>2.9</td> <td>3.2</td> <td>3.4</td> <td>3.6</td> <td>4.0</td> <td>4.6</td> <td>5.5</td> <td>6.0</td> <td>7.3</td> <td>8.7</td> <td>10.0</td> <td>12.4</td> <td>12.8</td> <td>13.8</td> </tr> <tr> <td>B</td> <td>1.5</td> <td>1.5</td> <td>1.6</td> <td>1.8</td> <td>1.9</td> <td>2.5</td> <td>2.9</td> <td>3.0</td> <td>3.9</td> <td>5.4</td> <td>6.5</td> <td>7.9</td> <td>7.5</td> <td>10.0</td> </tr> <tr> <td>C</td> <td>1/2</td> <td>3/4</td> <td>1</td> <td>1¼</td> <td>1½</td> <td>2</td> <td>2½</td> <td>3</td> <td>4</td> <td>5</td> <td>6</td> <td>8</td> <td>10</td> <td>12</td> </tr> <tr> <td>D</td> <td>.84</td> <td>1.05</td> <td>1.32</td> <td>1.66</td> <td>1.90</td> <td>2.38</td> <td>2.88</td> <td>3.50</td> <td>4.50</td> <td>5.56</td> <td>6.63</td> <td>8.63</td> <td>10.8</td> <td>12.8</td> </tr> <tr> <td>Wt</td> <td>.14#</td> <td>.22#</td> <td>.40#</td> <td>.52#</td> <td>.83#</td> <td>1.3#</td> <td>2.4#</td> <td>3#</td> <td>6#</td> <td>8.3#</td> <td>16#</td> <td>25#</td> <td>36#</td> <td>47#</td> </tr> </tbody> </table>		½	¾	1	1¼	1½	2	2½	3	4	5	6	8	10	12	A	2.9	3.2	3.4	3.6	4.0	4.6	5.5	6.0	7.3	8.7	10.0	12.4	12.8	13.8	B	1.5	1.5	1.6	1.8	1.9	2.5	2.9	3.0	3.9	5.4	6.5	7.9	7.5	10.0	C	1/2	3/4	1	1¼	1½	2	2½	3	4	5	6	8	10	12	D	.84	1.05	1.32	1.66	1.90	2.38	2.88	3.50	4.50	5.56	6.63	8.63	10.8	12.8	Wt	.14#	.22#	.40#	.52#	.83#	1.3#	2.4#	3#	6#	8.3#	16#	25#	36#	47#
	½	¾	1	1¼	1½	2	2½	3	4	5	6	8	10	12																																																																													
A	2.9	3.2	3.4	3.6	4.0	4.6	5.5	6.0	7.3	8.7	10.0	12.4	12.8	13.8																																																																													
B	1.5	1.5	1.6	1.8	1.9	2.5	2.9	3.0	3.9	5.4	6.5	7.9	7.5	10.0																																																																													
C	1/2	3/4	1	1¼	1½	2	2½	3	4	5	6	8	10	12																																																																													
D	.84	1.05	1.32	1.66	1.90	2.38	2.88	3.50	4.50	5.56	6.63	8.63	10.8	12.8																																																																													
Wt	.14#	.22#	.40#	.52#	.83#	1.3#	2.4#	3#	6#	8.3#	16#	25#	36#	47#																																																																													
<p>A Length Overall</p> <p>D Outside Diameter</p>	<p>B Length Hose Shank</p> <p>C Hose Shank Size</p>																																																																																										

National Equipment Corporation
 1806 Buchanan St.
 Brenham, Tx 77833

TEL: 409/830-8030
 TEL: 800/933-2316
 FAX: 409/830-0983