PRODUCT BULLETIN	Nylon Hose Couplings

SIZES AVAILABLE: 32 mm, 3/4", 1", 1-1/4" [1-1/2" is not produced in Nylon}

COMPONENTS: Fiberglass reinforced Nylon coupling body
Buna-N Gasket

WORKING PRESSURE: 125 PSI maximum recommended operating pressure

STANDARDS: Manufactured to accepted industry standards and interchangeable with all major brands.

- *Use safety clips in holes provided on each coupling.*
- *Pressurized media creates hazardous conditions. The hoses can separate with explosive force. Use Safety Cables to guard against accidental separation of lines. Tie-off hose to prevent whipping bucking of the hose.*
- *Due to the abrasive nature of the product being conveyed, couplings and gaskets should be frequently checked for excessive wear and replaced when necessary.*

DIMENSIONS

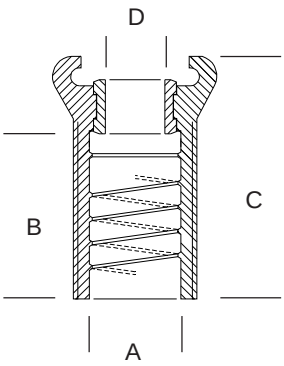

Part #	Hose ID	Hose OD A	Hose Length B	Length Overall C	Gasket ID D
NY-Q1M	3/4"	1-1/4"	2-1/2"	3-3/4"	1-1/4"
NY-Q1	3/4"	1-1/2"	2-3/4"	4-1/4"	1-1/4"
NY-Q2	1"	1-7/8"	3-7/16"	5"	1-1/4"
NY-Q3	1-1/4"	2-5/32"	3-7/16"	5"	1-1/4"

National Equipment Corp.
1806 Buchanan St.
Brenham, TX 77833

TEL: 979/830-8030
800/231-7201

FAX: 979/830-0983
800/447-2194